


Fan Louvre Shutters


Motorized Version / Type WAKM (aluminium)




- Aluminium fan louvre shutter for ventilation and exhaust ventilation
- Blades open when energized and close when disconnected
- No stage circuit possible
- Motor (230 V / 50 Hz / IP 51) is tightly fixed to the louvre shutter
- Suitable for an operating temperature range of -20 °C to +60°C
- Suitable for an operating temperature range of Soft-PVC rubber to +50°C
- Opening angle 85°
- Outdoor weathering resistant (UV-stabilized)

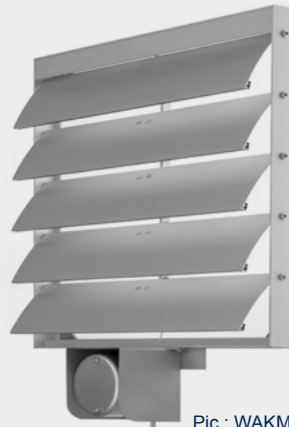

Pic.: WAKM



Pic.: Detail View

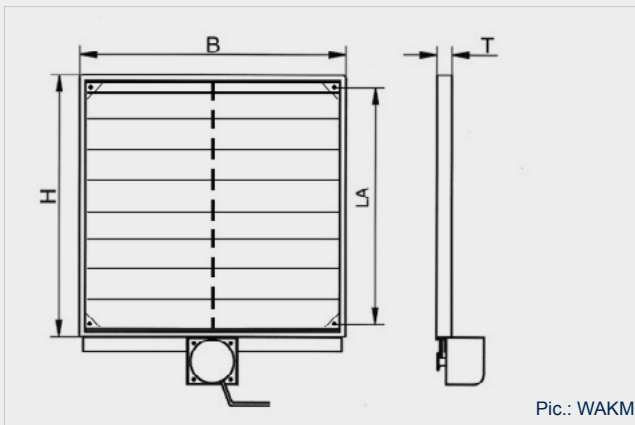

Pic.: WAKM

- Specific design guarantees high durability
- Blades and frame are manufactured of anodised aluminium
- Number of blades varies according to the size of the shutter
- Soft-PVC rubber insulation at the bottom of each blade - vibration- and sound-damping shut
- All requested dimensions (Type WAKM-S) can be manufactured beside standard sizes
- Easy fixing due to corner braces on the back side
- Each louvre shutter is individually carton-packed incl. a set of fastening parts (hole size 5mm) – from WAKM 75 without fastening parts

Type	Article-No.	D	H/B	LA	T	Free cross-section (cm²)
WAKM 20	23000090	210	240	190	30	290
WAKM 25	23000100	260	290	240	30	485
WAKM 30	23000001	310	340	290	30	727
WAKM 35	23000006	360	390	340	30	1017
WAKM 40	23000011	410	440	390	30	1354
WAKM 45	23000016	460	490	440	30	1739
WAKM 50	23000021	510	540	490	30	2171
WAKM 55	23000026	560	590	540	30	2651
WAKM 60	23000031	610	640	590	30	3178
WAKM 65	23000036	660	690	640	30	3753
WAKM 70	23000041	710	740	690	30	4375
WAKM 75*	23000046	760	790	740	30	5045
WAKM 80*	23000051	820	850	790	30	5762
WAKM 85*	23000056	870	900	850	30	6686
WAKM 90*	23000062	920	950	900	30	7507
WAKM 95*	23000066	970	1000	950	30	8377
WAKM 100*	23000072	1010	1050	1000	30	9293

Dimensions in mm. Subject to technical changes.

* with V2A inside angle with double-sided self-locking nut each 10 mm