


Weather Resistant Louvre


Type WS



- A custom-made application, an especially designed and developed specialized patented plastic that guarantees the visual appearance of metal for the louvre
- Gives the advantage of a lighter construction and reduced costs, additionally the product is resistant to humidity and ammonia as opposed to traditional metal productions
- This specialized plastic is, like all our quality products weather-proof (UV-stabilized) and hence suitable for exterior applications
- Weather resistant louvre for internal and external use
- Suitable for an operating temperature range of -30°C to +60°C
- Manufactured of high standard ecologically friendly plastic
- Fixed rain-proofed blades
- Specific design guarantees high durability
- Number and in-between spaces of the blades vary according to the size of the louvre
- The entry of small animals are prevented via a galvanized steel wire grid mounted on the backside (13 x 13 mm)
- The louvre will be immersed into the masonry or the facade cladding
- Available in various square and rectangular standard sizes
- Custom-made production is available for individual pieces or serial production

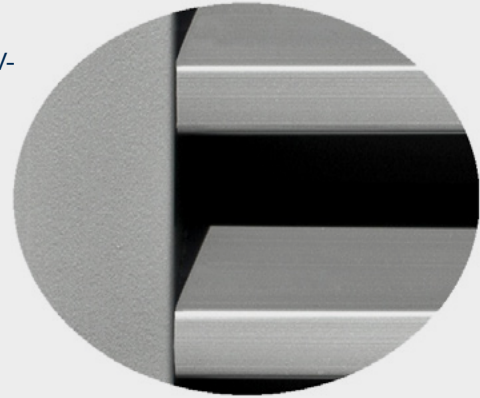


Pic.: WS - Detail View

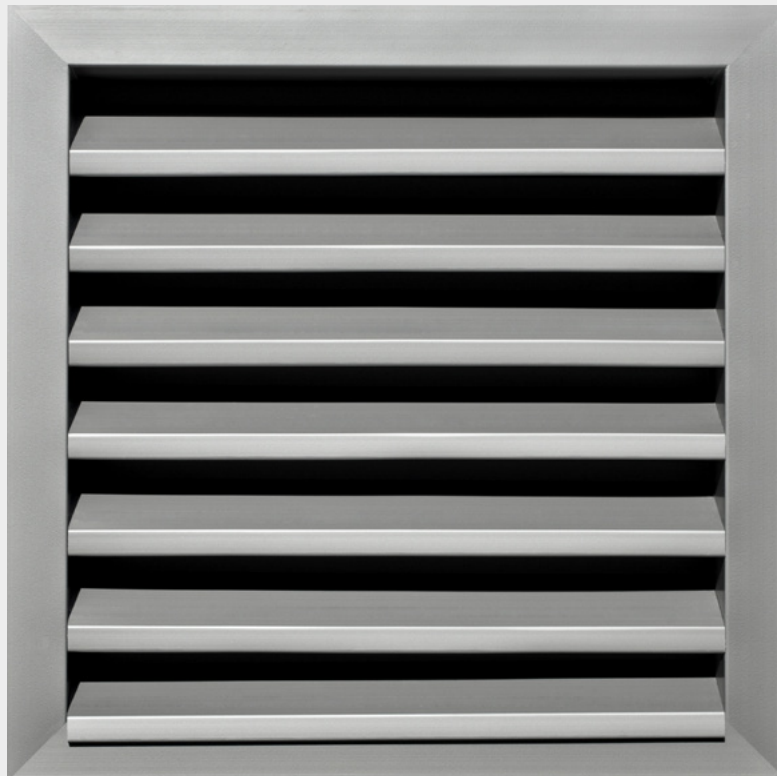


Pic.: WS

Square Design

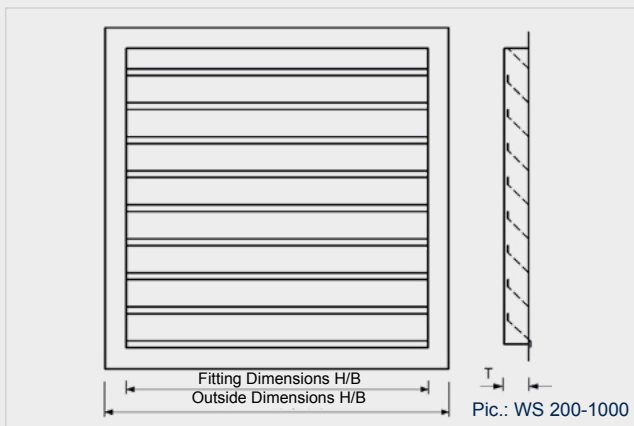

Rectangular Design

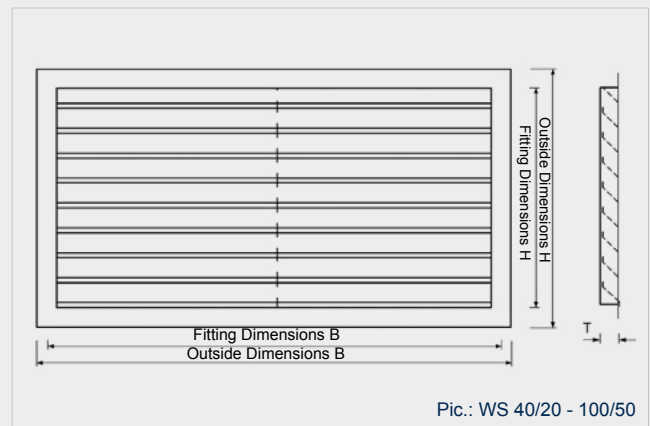

Type	Article-No.	Outside Dimensions	Fitting Dimensions	T	Free cross-section (cm ²)
		H/B	H/B		
WS 200	21000961	244	190	40	325
WS 250	21000971	294	240	40	518
WS 315	21000981	354	300	40	810
WS 355	21000991	394	350	40	1102
WS 400	21002031	444	390	40	1369
WS 450	21002041	494	440	40	1742
WS 500	21002051	544	490	40	2161
WS 560*	21002061	594	550	40	2722
WS 600*	21002071	644	590	40	3132
WS 630*	21002081	674	620	40	3459
WS 710*	21002091	754	700	40	4410
WS 750*	21002101	794	740	40	4928
WS 800*	21002111	844	790	40	5617
WS 850*	21002121	894	840	40	6350
WS 900*	21002131	944	890	40	7129
WS 950*	21002141	994	940	40	7952
WS 1000*	21002151	1044	990	40	8820

Dimensions in mm. Subject to technical changes.

anthracite ~ RAL 9023
* with middle strap

Type	Article-No.	Canal	Outside Dimensions	Fitting Dimensions	Outside Dimensions	Fitting Dimension	T	Free cross-section (cm ²)
		Dimension in mm	H	H	B	B		
WS 40/20	21002161	400 x 200	244	190	444	390	40	667
WS 50/25	21002171	500 x 250	294	240	544	490	40	1058
WS 50/30	21002181	500 x 300	344	290	544	490	40	1279
WS 60/30*	21002191	600 x 300	344	290	644	590	40	1539
WS 60/35*	21002201	600 x 350	394	340	644	590	40	1805
WS 70/40*	21002211	700 x 400	444	390	744	690	40	2422
WS 80/50*	21002221	800 x 500	544	490	844	790	40	3483
WS 100/50*	21002231	1000 x 500	544	490	1044	990	40	4365

Dimensions in mm. Subject to technical changes.

anthracite ~ RAL 9023
* with middle strap