


Ventilation Grilles


Plastic Grille / Type AG



- Plastic ventilation grille for supply and exhaust air
- Fixed, horizontal, manually adjustable blades
- Outdoor weathering resistant (UV-stabilized)
- Suitable for an operating temperature range of -30°C to +60°C
- Specific design guarantees high durability
- The grille has to be installed deepened into the cladding on the facade of the masonry

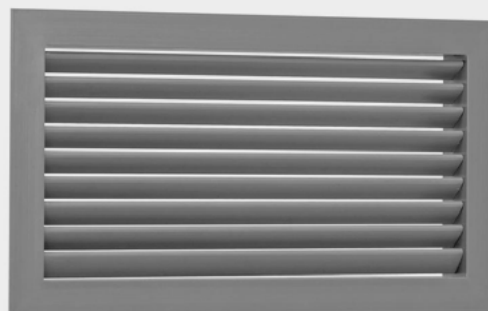

Pic.: AG

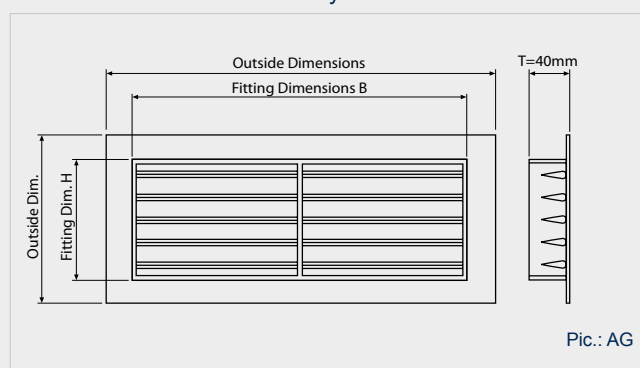

Pic.: AG

- Manufactured of high standard ecologically friendly plastic
- Number of blades varies according to the size of the grille
- Production according to your requested dimensions; please indicate the exact fitting dimensions

Type	Article-No.	Fitting Dimensions H	Fitting Dimensions B	T	Free cross-section (cm ²)
	light grey				
AG 125/225	45001640	125	225	40	253
AG 125/325	45001680	125	325	40	365
AG 125/425	45001710	125	425	40	478
AG 125/525	45001740	125	525	40	590
AG 125/625	45001770	125	625	40	703
AG 125/825	45001800	125	825	40	928
AG 125/1025	45001830	125	1025	40	1153
AG 125/1225	45001870	125	1225	40	1378
AG 225/225	45001910	225	225	40	455
AG 225/325	45000130	225	325	40	658
AG 225/425	45001970	225	425	40	860
AG 225/525	45002000	225	525	40	1063
AG 225/625	45002030	225	625	40	1265
AG 225/825	45002070	225	825	40	1670
AG 225/1025	45002110	225	1025	40	2075
AG 225/1225	45002150	225	1225	40	2480
AG 325/225	45002190	325	225	40	658
AG 325/325	45000120	325	325	40	950
AG 325/425	45000110	325	425	40	1243
AG 325/525	45002280	325	525	40	1535
AG 325/625	45002320	325	625	40	1828
AG 325/825	45002360	325	825	40	2413
AG 325/1025	45002390	325	1025	40	2998
AG 325/1225	45002430	325	1225	40	3583

Dimensions in mm. Subject to technical changes.

light grey ~ RAL 7035